


CA-64 PTSA

SYNOPTIC BOARD

Synoptic table module, designed for development of a system for LEDs visualisation of the alarm control unit's status

- connecting of up to 128 LEDs for indicating zone/partition
- RS-232 for communication with **GUARDX** application
- onboard switching mode power supply

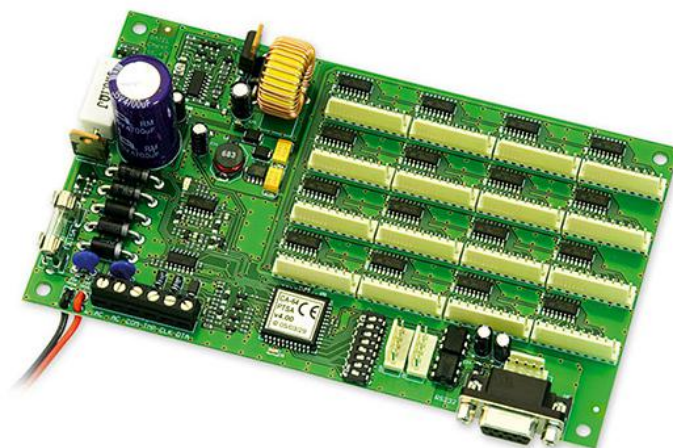

TECHNICAL DATA

Environmental class	II
Max. battery capacity	7 Ah
Power supply rating	1,3 A
Board dimensions	173 x 102 mm
Operating temperature range	-10...+55 °C
Supply voltage (±15%)	20 V AC, 50-60 Hz
Standby mode current consumption	25 mA
Max. current consumption	40 mA
Weight	202 g

